



# GENERAL DEMOLITION NOTES

1. DEMOLITION WORK WILL BE COVERED BY THE EXTENT OF NEW CONSTRUCTION INVOLVED. CONTRACTOR WILL VERIFY AND COORDINATE DEMOLITION WORK WITH RESPECT TO THE NEW CONSTRUCTION. CONTRACTOR TO VERIFY EXISTING CONDITIONS BEFORE START OF WORK.
2. SPACE NAMES SHOWN ON NEW FLOOR PLANS WITH SPACE NUMBERS NEXT TO THEM ARE TO HAVE NEW WORK DONE IN THEM. COORDINATE WITH THE FINISH SCHEDULE.
3. MATCH THICKNESS OF EXISTING WALL AND CEILING FINISH MATERIAL WHERE PATCHING AND REPAIRING IS REQUIRED.
4. IT IS THE CONTRACTOR'S RESPONSIBILITY TO NOTIFY THE ARCHITECT AND COORDINATE INSPECTIONS (IF REQUIRED) BY STATE AGENCIES AND MEET ANY APPLICABLE CODE FOR REUSE OF EXISTING PLUMBING FIXTURES, DIFFUSERS, AND DUCTWORK.
5. COORDINATE DEMOLITION PLANS WITH PLANS FOR NEW CONSTRUCTION FOR EXTENT OF REMOVAL. REMOVE ONLY THOSE PORTIONS OF WALLS AND FLOORS NECESSARY TO ACCOMMODATE NEW CONSTRUCTION. TAKE REASONABLE CARE IN REMOVAL OF ITEMS TO BE RELOCATED AND REUSED.
6. CONTRACTOR SHALL CHECK ALL WALLS IN THOSE AREAS OF RENOVATION FOR OPENINGS. ANY OPENINGS SHALL BE CLOSED TIGHT AS REQUIRED TO MATCH EXISTING CONSTRUCTION AND TO MAINTAIN NEW OR EXISTING WALL RATING. THIS IS TYPICAL FOR ALL WORK DONE IN AREAS WHERE RENOVATION IS BEING DONE.
7. OPENINGS TO BE CLOSED IN EXISTING FIRE OR SMOKE WALLS SHALL BE PATCHED TO MATCH EXISTING CONSTRUCTION AND TO MAINTAIN THE INTEGRITY OF THE WALL. THIS IS TYPICAL FOR ALL WORK DONE IN AREAS WHERE NEW CONSTRUCTION AND RENOVATION IS BEING DONE.
8. ALL WALLS SHOWN BY DASHED LINES ARE TO BE REMOVED COMPLETELY, ALONG WITH DOORS AND FRAMES, ELECTRICAL ITEMS, PLUMBING FIXTURES, CASEWORK, ETC. SEE DEMOLITION PLANS OF MPE&E DISCIPLINES AND FINISH PLANS.
9. ALL WORK SHALL BE SCHEDULED IN A MANNER TO MAINTAIN THE OWNERS CONTINUOUS USE OF THE BUILDING.
10. SEE LIMITS OF CONSTRUCTION ON NEW FLOOR PLANS. GENERALLY, ROOMS OUTSIDE OF LIMITS OF CONSTRUCTION ARE NOT TO HAVE ANY WORK DONE IN THEM WITH THE EXCEPTION OF FLOOR OR CEILING TO BE PATCHED OR REPAIRED FOR INSTALLATION OF NEW WORK. CONTRACTOR SHALL USE EXISTING FLOOR OR CEILING MATERIALS FOR REPAIR. SALVAGED FROM AREAS WHERE EXISTING MATERIALS ARE REMOVED OR ALL NEW MATERIAL IN A ROOM IF NECESSARY THAT MATCH EXISTING FINISHES.
11. PROVIDE APPROVED U.L. 2 HR FIRE/SMOKE ASSEMBLY FOR ALL EXISTING FLOOR PENETRATIONS.

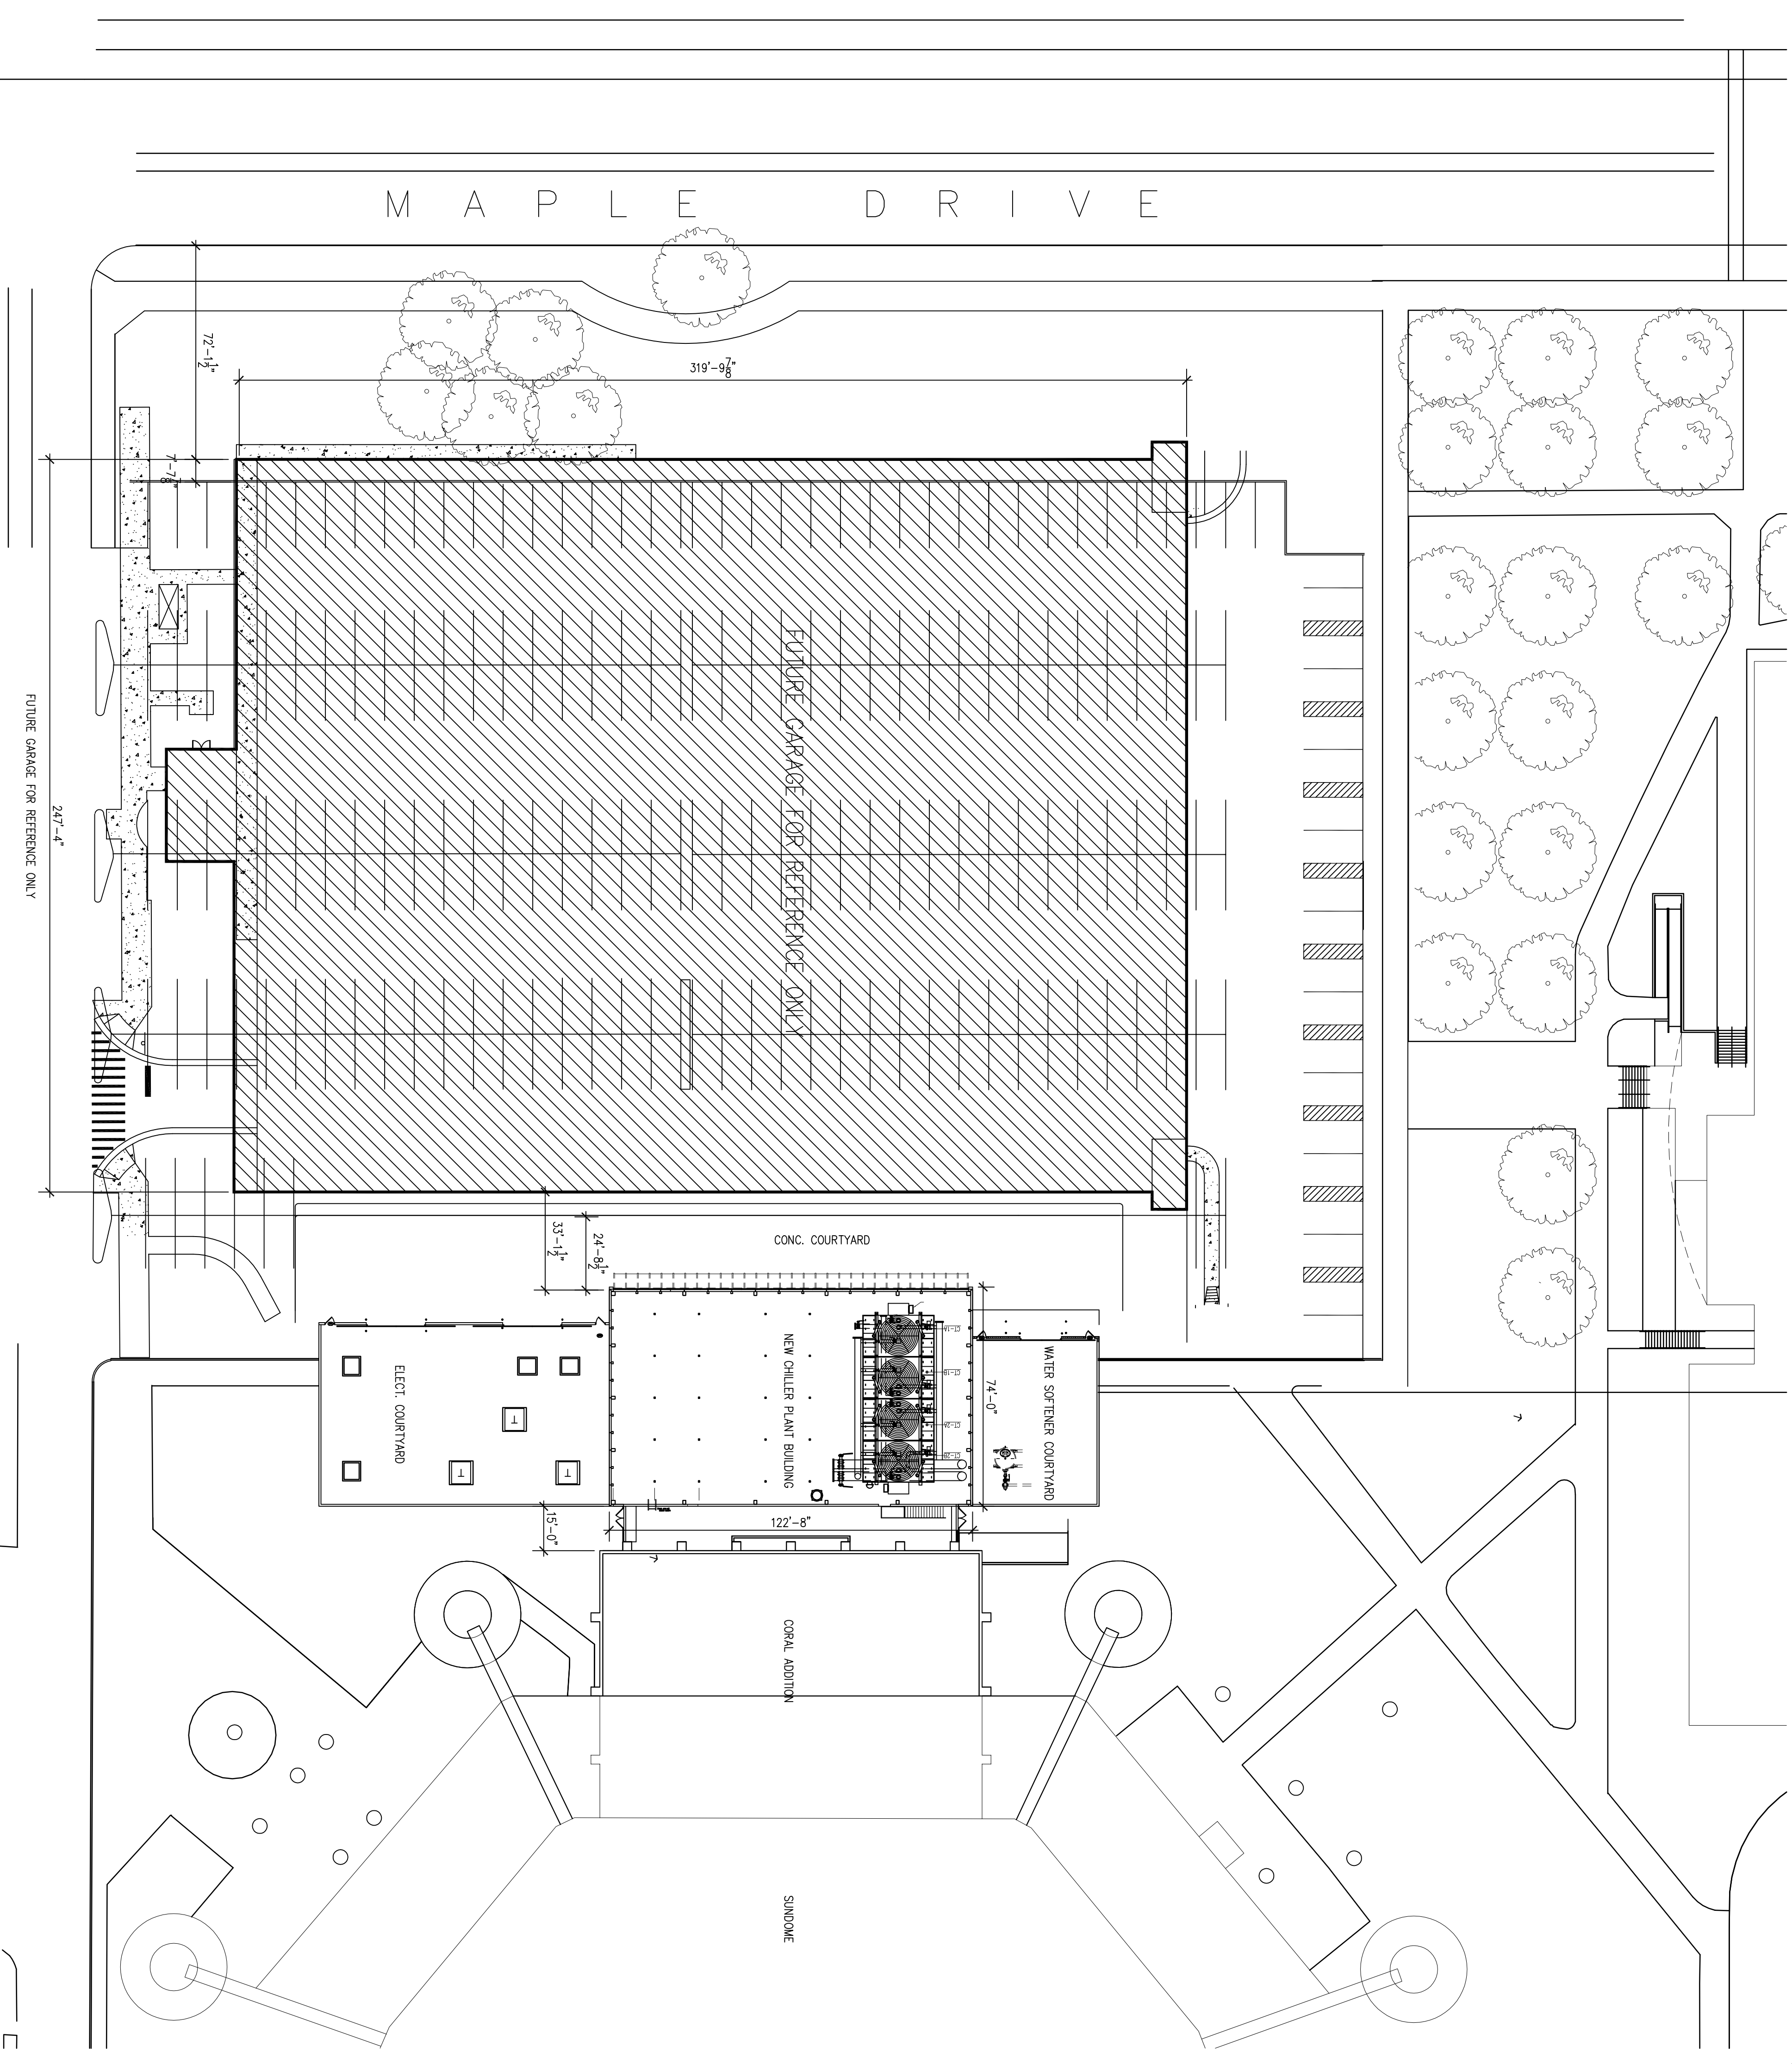

1 ARCHITECTURAL SITE PLAN  
SCALE: 1"=30'-0"

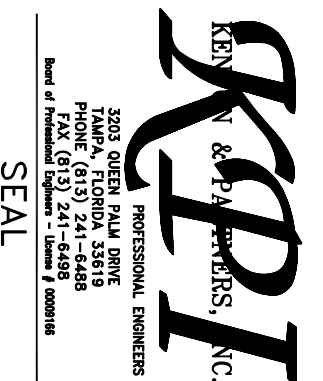

RBK ARCHITECTS INC.  
GREGORY T. WEHLING  
FL LIC. NO. AR 0091800

REVISION	COMMENTS	DATE

## UNIVERSITY OF SOUTH FLORIDA SOUTH EAST CHILLER PLANT BR-590 COMPONENT #6

DRAWING TITLE :  
SOUTHEAST CHILLER PLANT  
ARCHITECTURAL SITE PLAN

Drawing Progress: 100% Construction Documents

FILE NAME: 03-51-2009  
DATE: 03-51-2009  
PLOT SIZE: AS NOTED  
CADDED BY: GTW  
DESIGNED BY: GTW  
CHECKED BY: BA  
PROJECT NO. 081106  
SHEET NO.

**RBK ARCHITECTS**  
2804 N. 36TH STREET TAMPA, FL 33605  
TEL: 813.247.5223 FAX: 813.224.9158  
AAC 005000 RBK-ARCH.COM

A-1  
— OF —