


ABBREVIATION (NOT ALL ARE USED)

A.A.C.	AERATED AUTOCLAVED CONCRETE	K.O.	KNOCKOUT
A.F.F.	ABOVE FINISH FLOOR	LB.	POUND
A/C	AIR CONDITIONING	MAX.	MAXIMUM
AL	ALUMINUM	MFG.	MANUFACTURER
ALT.	ALTERNATIVE	MIN.	MINIMUM
B.H.	BULKHEAD	MIR.	MIRROR
B.O.	BOTTOM OF	M.O.	MASONRY OPENING
BOT.	BOTTOM	MTL.	METAL
BRC.	BEARING	O.C.	ON CENTER
		O.D.	OUTSIDE DIAMETER
		O.I.S.	OPENING IN SLAB
		OPP.	OPPOSITE
CLA	CLEAR ANODIZED	P.J.	PANEL JOINT
CLG.	CEILING	P.F.	PREFINISHED
CW.	CURTAIN WALL	PL	PANEL
C.J.	CONTROL JOINT	PR.	PAIR
CONC.	CONCRETE	PT.	PAINTED
		R.O.	ROUGH OPENING
		REFL.	REFLECTED
DIA.	DIAMETER	S.F.	SQUARE FEET
DTL.	DETAIL	STRUC.	STRUCTURE
DN.	DOWN	STL.	STEEL
DWGS.	DRAWINGS	T	TEMPERED GLASS
		T.F.	INCLUDED IN TENANT
EA.	EACH	T.O.	TOP OF
ELEV.	ELEVATION	TYP.	TYPICAL
E.O.S.	EDGE OF SLAB	U.N.O.	UNLESS NOTED OTHERWISE
EQ.	EQUAL	V.I.F.	VERIFY IN FIELD
EXT	EXTERIOR	W.C.	WATER CLOSET
		W.C.'S	WATER CLOSETS
F.	FIRE GLASS	W.H.	WATER HEATER
FIN.	FINISH	W/V	WITH
FL	FLOOR	WD	WOOD
FT.	FEET	W.S.	WATER SOFTENER
FO.	FINISH OPENING		
GALV.	GALVANIZED		
HC.	HANDICAP		
H.M.	HOLLOW METAL		
HR.	HOUR		
ID.	INSIDE DIAMETER		
IN.	INCH		
INT.	INTERIOR		

DEMOLITION NOTES

- ① REMOVE ALL EXISTING FLOORING, AND REPAIR AND CLEAN SLAB AS REQUIRED TO RECEIVE NEW FLOORING MATERIAL.
- ② DEMOLISH EXISTING FRENCH DOORS & FRAME AND PREPARE FOR NEW CONSTRUCTION.
- ③ DEMOLISH EXISTING CHAIR RAIL AND PREPARE FOR NEW CONSTRUCTION. PATCH AND REPAIR EXISTING GYPSUM BOARD AS REQUIRED.
- ④ REMOVE EXISTING CHANDELIER LIGHT FIXTURES AND RETURN TO OWNER.
- ⑤ DEMOLISH EXISTING BUFFET ASSEMBLY AND PREPARE FOR NEW CONSTRUCTION.
- ⑥ DEMOLISH EXISTING PARTITION AND PREPARE FOR NEW CONSTRUCTION.
- ⑦ DEMOLISH EXISTING FRENCH DOORS, SIDELIGHTS & TRANSOMS, AND PREPARE FOR NEW CONSTRUCTION.
- ⑧ REMOVE EXISTING CEILING GRID AND ACOUSTICAL TILES AND PREPARE FOR NEW CONSTRUCTION.
- ⑨ DEMOLISH EXISTING DOOR & FRAME AND PREPARE FOR NEW CONSTRUCTION.
- ⑩ DEMOLISH EXISTING MECHANICAL RETURN AND RELOCATE PER MECHANICAL DRAWINGS.
- ⑪ DEMOLISH EXISTING SOFFIT AND PREPARE FOR NEW CONSTRUCTION.
- ⑫ REMOVE EXISTING WALLCOVERING AND PREPARE SURFACE FOR NEW FINISHES.
- ⑬ DEMOLISH EXISTING PARTITION & POCKET DOORS AND PREPARE FOR NEW CONSTRUCTION.
- ⑭ REMOVE EXISTING CURTAINS AND TRACK AND RETURN TO OWNER.
- ⑮ PATCH EXISTING FLOOR FROM REMOVAL OF EXISTING FLOOR SINK.
- ⑯ REMOVE EXISTING WALL SCONCE LIGHT FIXTURES AND RETURN TO OWNER.
- ⑰ REMOVE AND RELOCATE EXISTING ELECTRICAL PANEL. SEE ELECTRICAL DRAWINGS FOR LOCATION.
- ⑱ DEMOLISH EXISTING MILLWORK.

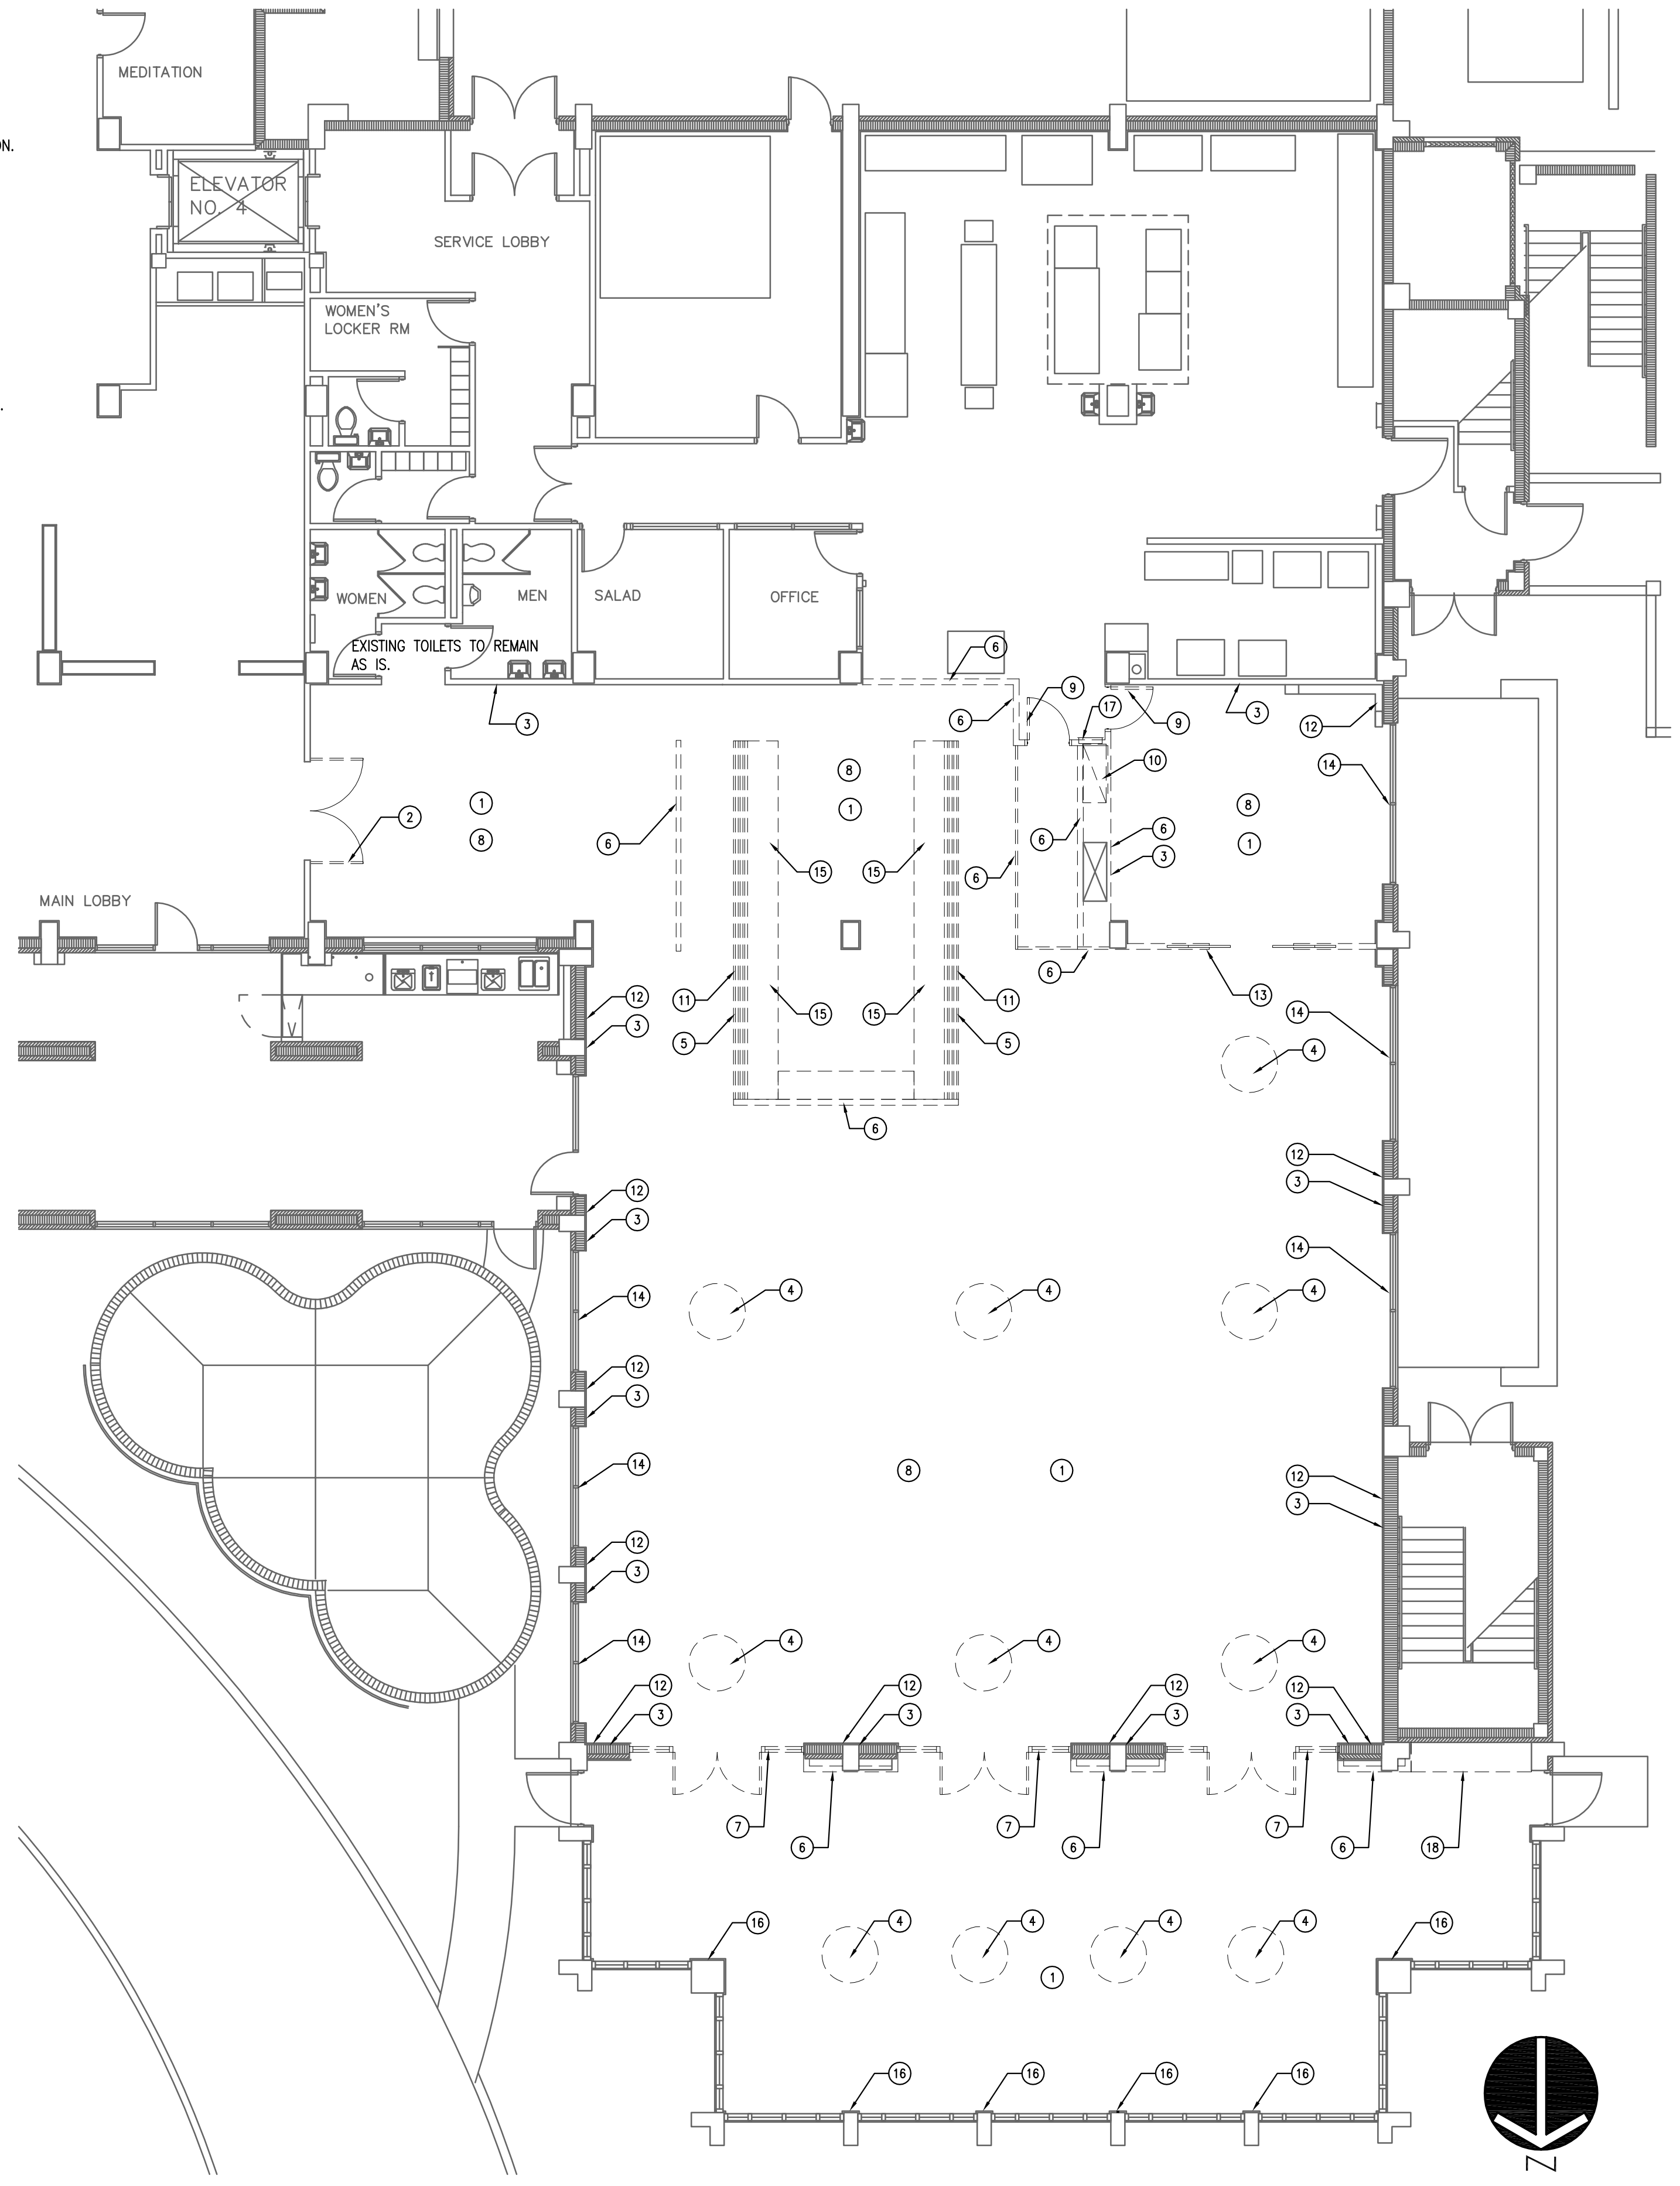

1 **DEMOLITION PLAN**
IA100 SCALE: 1/8" = 1'-0"

Owner:
WESTMINSTER COMMUNITIES OF FLORIDA
80 WEST LUCERNE CIRCLE
Orlando, FL 32801
Phone: (407) 839-0707
Fax: (407) 839-0079

G4
architecture
4700 Millenia Blvd., Suite 350
Orlando, Florida 32839
TEL: 407.363.6136
FAX: 407.363.6131
©copyright 2010

Project:
WESTMINSTER TOWERS ORLANDO
DINING ROOM AND SERVING AREA RENOVATION
70 WEST LUCERNE ORLANDO, FL 32801

Scope Drawings:
These drawings indicate the general scope of the project in terms of architectural design concept, the dimensions of the building, the major architectural elements and the type of structural, mechanical and electrical systems.
The drawings do not necessarily indicate or describe all work required for full performance and completion of the requirements of the contract.
On the basis of the general scope indicated or described, the trade contractors shall furnish all items required for the proper execution and completion of the work.

Drawing Title:
DEMOLITION PLAN

Revisions:

Issue Date	Drawn By	Checked By
05/14/10	MJA	CMS

Certified By:

Drawing Number:
IA100

Project Number:
10023