

**TREE PROTECTION NOTES**

1. DURING CONSTRUCTION, PROTECTIVE BARRIERS SHALL BE PLACED BY SITE CONTRACTOR TO PREVENT DESTRUCTION OF TREES WHICH ARE DESIGNATED TO REMAIN. PROTECTIVE BARRIERS SHALL BE ERECTED PRIOR TO CONSTRUCTION OF ANY KIND ON THE SITE.
2. BARRIERS SHALL CONSIST OF PROTECTIVE WOODEN POSTS TWO (2) INCHES BY FOUR (4) INCHES OR LARGER PLANTED IN SUFFICIENT DEPTH TO BE STABLE WITH AT LEAST FOUR (4) FEET OF POST VISIBLE ABOVE THE GROUND. POSTS SHALL BE PLACED NO CLOSER THAN FIVE (5) FEET TO THE TRUNK UNLESS PROPOSED PAVING CONSTRUCTION WILL NOT PERMIT. POSTS SHALL BE NO FURTHER THAN SIX (6) FEET APART. REFER TO TREE PROTECTION BARRIER DETAIL. EACH SECTION SHALL BE LINKED TOGETHER WITH ORANGE POLYPROPYLENE NET FENCE MATERIAL.
3. PROPOSED GRADES AROUND TREES TO REMAIN SHALL BE MAINTAINED TO WITHIN FOUR (4) INCHES OF THE EXISTING GRADE.
4. THE CONTRACTOR SHALL FOLLOW TREE REMOVAL, TREE PROTECTION AND GENERAL PLANTING REQTS. AS DEFINED BY LOCAL JURISDICTION.
5. PROTECTIVE BARRIERS SHALL REMAIN IN PLACE AND INTACT UNTIL SUCH TIME AS CONSTRUCTION IS COMPLETE AND ALL EQUIPMENT IS REMOVED FROM SITE.
6. NO BUILDING MATERIALS SUCH AS MACHINERY OR TEMPORARY SOIL DEPOSITS SHALL BE PLACED WITHIN THE PROTECTIVE BARRIER ZONES.
7. BARRIERS SHALL BE PLACED AT THE TREE CANOPY DRIP LINE AND ADJACENT TO THE PROPERTY CONSTRUCTION AREA WHERE IT MAY BE AT ONE HALF OF THE CANOPY DISTANCE ON ONE SIDE ONLY.

**EXISTING TREE LEGEND**

✕ 6" OAK EXISTING TREE TO BE REMOVED

**TREES REMOVED ON SITE**

- 63-4" OAKS
- 32-6" OAKS
- 13-8" OAKS
- 5-10" OAKS
- 13-4" PINE
- 11-6" PINE
- 4-8" PINE
- 10-10" PINE
- 11-12" PINE
- 8-14" PINE
- 5-16" PINE
- 6-18" PINE
- 1-20" PINE
- 6"-10" DOUBLE OAK
- 4"-6" DOUBLE OAK
- 14"-6" DOUBLE PINE
- 14"-14" DOUBLE PINE

**TREE CALCULATIONS**

110" INCHES OF NATIVE REPLACEMENT TREES REQUIRED  
28 NATIVE TREE @ 4" = 111"

REPLACEMENT TREES SHALL BE NATIVE TREES  
EQUAL TO A MINIMUM OF 100 INCHES DBH PER ACRE.

1.10 AC. = 110" TO BE REPLACED

110" @ 4" CAL. = 28 TREES


29 TREES PROVIDED (SEE LANDSCAPE PLAN)

PROTECTION OF NATIVE PLANT COMMUNITIES OR EXISTING PLANTINGS. MAXIMUM EFFORT SHOULD BE MADE TO SAVE EXISTING NATIVE OR APPROVED NON-INVASIVE AND DROUGHT TOLERANT PLANT COMMUNITIES AND PLANT SPECIMENS. NO CONSTRUCTION MATERIAL OR TEMPORARY SOIL DEPOSITS SHALL BE PLACED WITHIN FOUR FEET OF SHRUBS OR WITHIN THE DRIPLINE OF TREES DESIGNATED ON THE LANDSCAPE PLAN TO BE RETAINED. PROTECTIVE BARRIERS SHALL BE INSTALLED AROUND EACH PLANT OR GROUP OF PLANTS WHICH ARE TO BE PROTECTED, AND SHALL BE SELF SUPPORTING. PROTECTIVE BARRIERS SHALL BE A MINIMUM OF FOUR FEET HIGH AND CONSTRUCTED OF A HIGHLY VISIBLE DURABLE MATERIAL THAT WILL LAST UNTIL CONSTRUCTION IS COMPLETED. HEAVY-DUTY PLASTIC CONSTRUCTION SITE BARRIER FENCING IS AN EXAMPLE OF AN ACCEPTABLE BARRIER.



By:	
Revision/Issue:	DRC COMMENTS
Date:	6-18-10
No.:	1

SEAL  
CARLOS A. BARRIOS, PE  
PE No. 61415

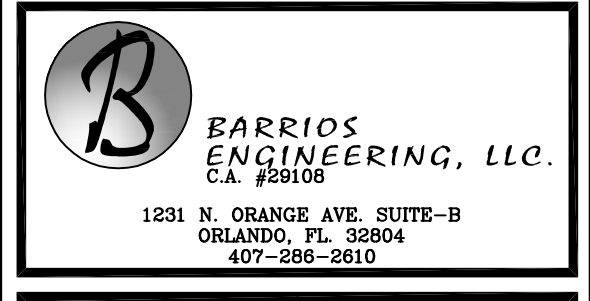

**FAMILY DOLLAR**  
MARION OAKS BLVD.  
MARION COUNTY, FLORIDA

**EXISTING TREE PLAN**

Date	05/10/10	Sheet	LS1.1
Project #	2010.001		

CALL 48 HOURS BEFORE YOU DIG  
**It's the Law!**  
1-800-432-4770  
SUNSHINE STATE ONE CALL OF FLORIDA, INC.